



## **WIRELESS PRODUCTS**

# **700 / 850 / 1900 Band Combiner**

**Model Number: CCFA-386-1W**


PARAMETER	SPECIFICATION
FREQUENCY RANGE	
COMMON PORT	698 – 2000 MHz
700 BAND PORT	698 – 793 MHz
850 BAND PORT	824 – 896 MHz
1900 BAND PORT	1850 – 2000 MHz
PASSBAND INSERTION LOSS	0.3 dB Max
PASSBAND RETURN LOSS	24 dB Min
PORT TO PORT ISOLATION	60 dB Min
REJECTION FROM 1900 BAND	40 dB Min in AWS Frequencies
PASSIVE INTERMODS	-153 dBc
POWER HANDLING	500 W CW / Avg. 12.5 kW Peak
OPERATING TEMPERATURE	-40°C to +60°C Operating
ENVIRONMENTAL	Per ETS-300
WEATHERIZATION	Per IP-68
LIGHTENING PROTECTION	Per EN / IEC 61000 4-5, Level 4
CONNECTORS	7/16 DIN Female - Long Neck
SIZE	10.1 x 10.7 x 3.3"
WEIGHT	Approx 16 lbs

Revision: 010312



# WIRELESS PRODUCTS

## 700 / 850 / 1900 Band Combiner

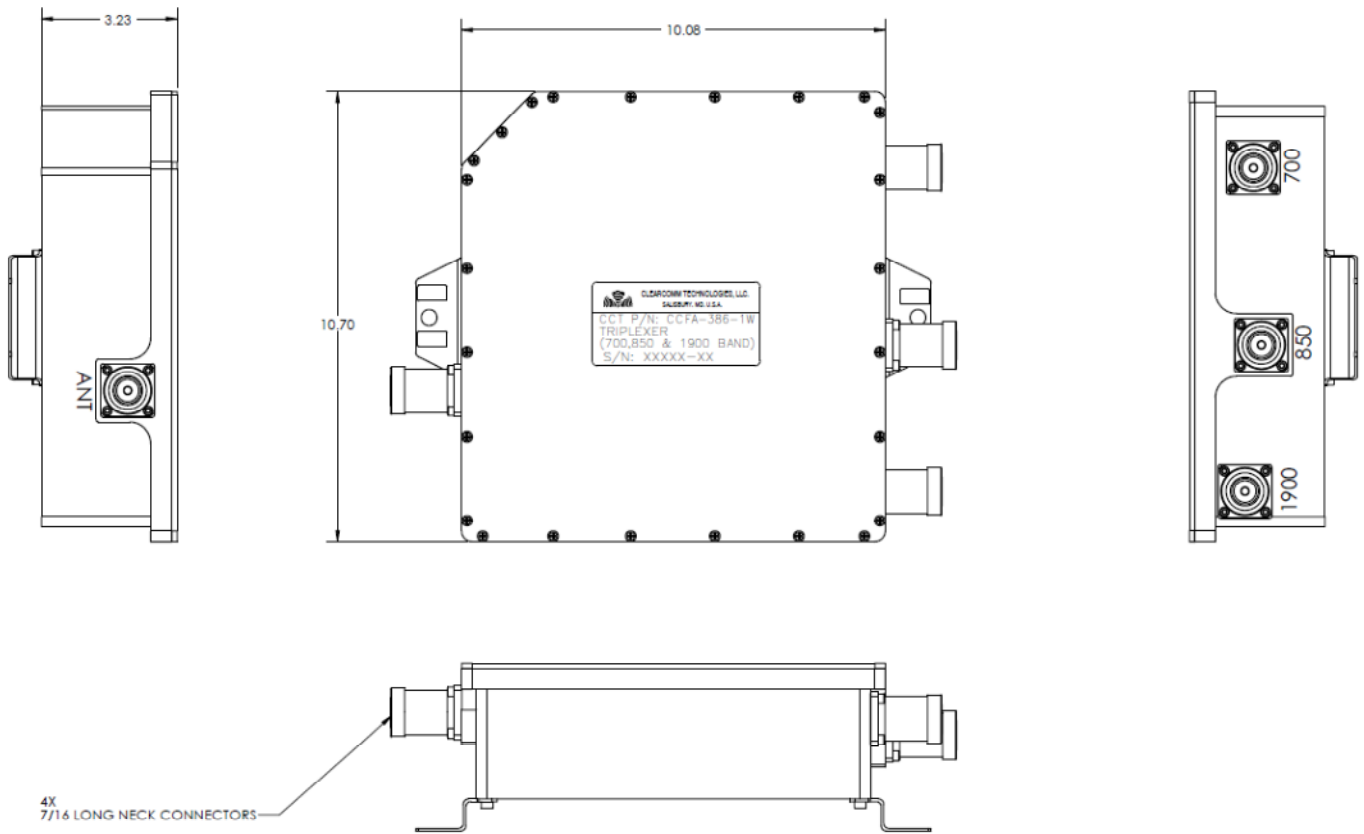

OUTLINE DRAWING

Revision: 010312

28410 Crown Road  
Tel: 410-860-0500  
Web: [www.clearcommtech.com](http://www.clearcommtech.com)

**ClearComm Technologies, LLC**  
**Clearly the Choice!**

Fruitland, MD 21826  
Fax: 410-860-9005  
E-Mail: [sales@clearcommtech.com](mailto:sales@clearcommtech.com)