



WIRELESS PRODUCTS

DC BLOCK

COMMON PARAMETERS	SPECIFICATION
FREQUENCY RANGE	380 - 2700 MHz
INSERTION LOSS	0.3 dB Max.
RETURN LOSS	20 dB Min.
POWER RATING	500W Avg. 5kW Peak Any Port
PASSIVE INTERMODS	-155 dBc
DC VOLTAGE RATING	3.5 kV (6 kV Test Voltage)
CONNECTORS	Type 'N', 7/16 DIN, 4.1/9.5 Mini DIN, 4.3/10.0 Mini DIN Connectors are generally Female / Male
DIMENSIONS	2.0 x 1.5 x 1.5" Excluding Connectors, See Outline
WEIGHT	0.8 lbs
TEMPERATURE RANGE	-20° to +65°C Operating
WEATHERIZATION	IP-65


ClearComm Model Number	DC BLOCK
CCDB-101	Inner Conductor
CCDB-102	Outer Conductor
CCDB-103	Inner and Outer Conductors

Revision: 091415

28410 Crown Road
Tel: 410-860-0500
Web: www.clearcommtech.com

ClearComm Technologies, LLC
Clearly the Choice!

Fruitland, MD 21826
Fax: 410-860-9005
E-Mail: sales@clearcommtech.com

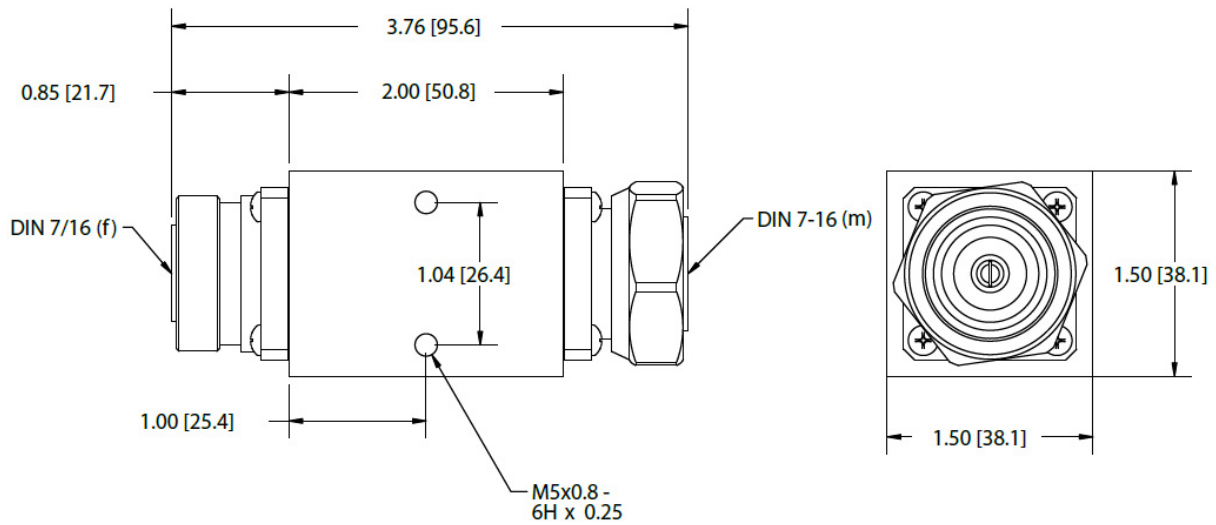

DC BLOCK - OUTLINE

Revision: 052215