



WIRELESS PRODUCTS

AWS Band Tx Filter


ClearComm Model# CCTF-177

PARAMETER	SPECIFICATION
PASSBAND	2110 - 2155 MHz
PASSBAND INSERTION LOSS	0.3 dB Max.
PASSBAND LOSS VARIATION	0.2 dB Max.
PASSBAND RETURN LOSS	18 dB Min.
REJECTION 1710 - 1755 MHz 1930 - 1990 MHz	80 dB Min. 80 dB Min.
POWER HANDLING	25 Watts Avg, 500 Watts Peak
OPERATING TEMP. RANGE	-25 to +70° C
CONNECTORS	SMA Female, Type 'N' Female Optional
SIZE	3.90 x 2.45 x 2.00"
MOUNTING OPTIONS	Wall Mount, 19" Tray, Cable Ladder



WIRELESS PRODUCTS

AWS Band Tx Filter

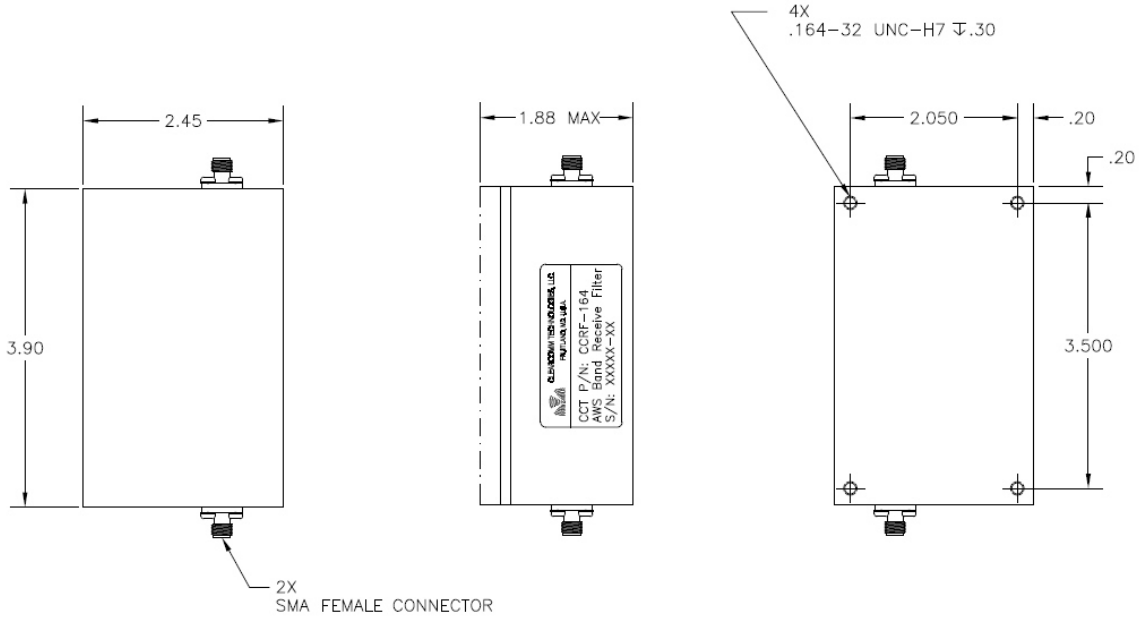

OUTLINE DRAWING