



## WIRELESS PRODUCTS

### Multi Band Combiner

#### Model Number: CCFA-430

PARAMETER	SPECIFICATION
PASSBAND 700 + AWS BAND PORT 850 + 1900 BAND PORT	698 - 793 MHz, 1710 - 1755 & 2110 - 2155 MHz 824 - 894 MHz & 1850 - 2000 MHz
PASSBAND INSERTION LOSS	0.5 dB Max.
PASSBAND RETURN LOSS	20 dB Min.
PORT TO PORT ISOLATION BAND TO BAND ISOLATION	60 dB Min. 60 dB Min.
PASSIVE INTERMODS	-153 dBc
POWER HANDLING	300 W CW / Avg. 5 kW Peak
OPERATING TEMPERATURE	-50° to +60° Operating
CONNECTORS	Type 'N' Female
SIZE	9.98 x 7.98 x 3.0 Ins.
WEIGHT	Approx. 10 lbs.
AVAILABLE OPTIONS	<ul style="list-style-type: none"> <li>Type 'N' Female or 7/16 DIN Female Connectors Available</li> <li>Mounting: Tower, Cable Tray, Ladder or Rack Mount Options Available</li> </ul>

Revision: 080514

28410 Crown Road  
Tel: 410-860-0500  
Web: [www.clearcommtech.com](http://www.clearcommtech.com)


*ClearComm Technologies, LLC*  
*Clearly the Choice!*

Fruitland, MD 21826  
Fax: 410-860-9005  
E-Mail: [sales@clearcommtech.com](mailto:sales@clearcommtech.com)



# WIRELESS PRODUCTS

## Multi Band Combiner

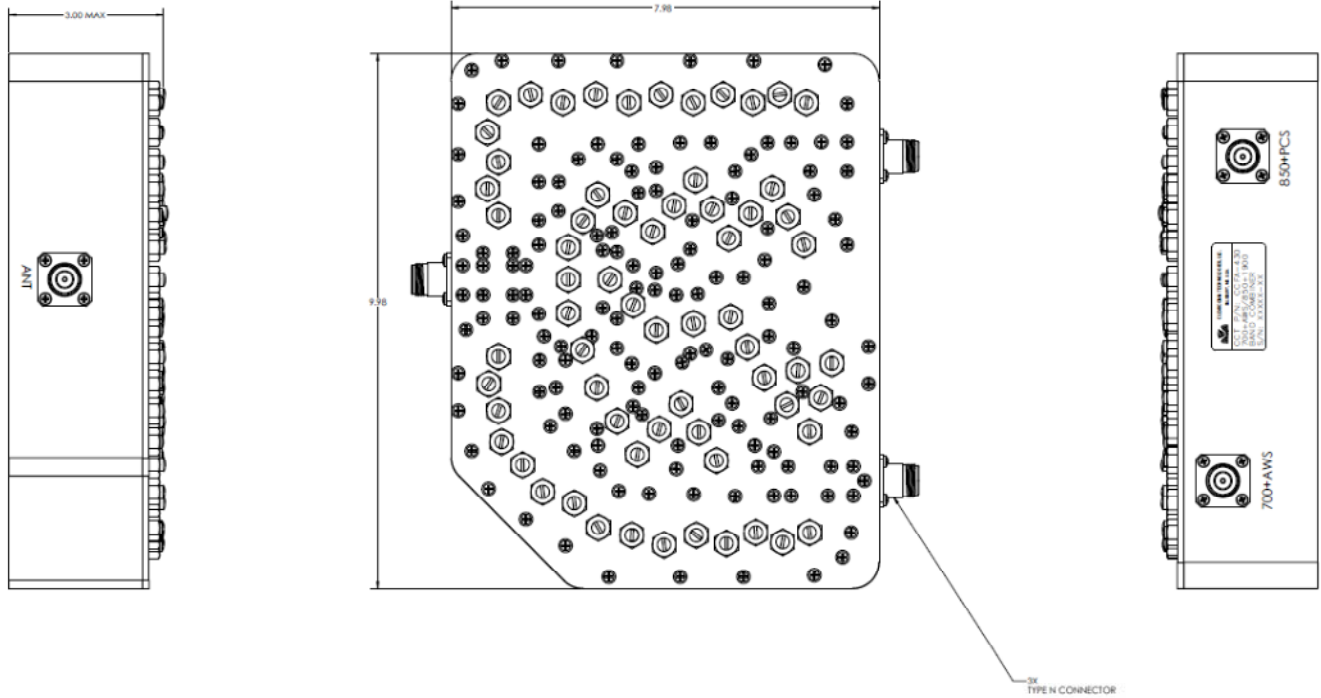

### OUTLINE

Revision: 080514

28410 Crown Road  
Tel: 410-860-0500  
Web: [www.clearcommtech.com](http://www.clearcommtech.com)

*ClearComm Technologies, LLC*  
*Clearly the Choice!*

Fruitland, MD 21826  
Fax: 410-860-9005  
E-Mail: [sales@clearcommtech.com](mailto:sales@clearcommtech.com)