



WIRELESS PRODUCTS

Multi Band Combiner

Model Number: CCFA-433


| PARAMETER | SPECIFICATION |
|-------------------------|--|
| PASSBAND | |
| COMMON PORT | 698 - 2155 MHz |
| 700 BAND PORT | 698 - 793 MHz |
| 850 BAND PORT | 824 - 894 MHz |
| AWS BAND PORT | 1710 - 1755 MHz & 2110 - 2155 MHz |
| 1900 BAND PORT | 1850 - 2000 MHz |
| PASSBAND INSERTION LOSS | 0.5 dB Max. |
| PASSBAND RETURN LOSS | 20 dB Min. |
| PORT TO PORT ISOLATION | 60 dB Min. |
| PASSIVE INTERMODS | -153 dBc |
| POWER HANDLING | 300 W CW / Avg. 5 kW Peak |
| OPERATING TEMPERATURE | -50° to +60° Operating |
| CONNECTORS | Type 'N' Female |
| SIZE | 9.98 x 7.98 x 3.0 Ins. |
| WEIGHT | Approx. 10 lbs. |
| AVAILABLE OPTIONS | <ul style="list-style-type: none"> • Connectors, 7/16 DIN or Type 'N' Female • Mounting: Wall Mount, Tower, Cable Tray, Ladder or Rack Mount Options Available |

Revision: 080514



WIRELESS PRODUCTS

Multi Band Combiner

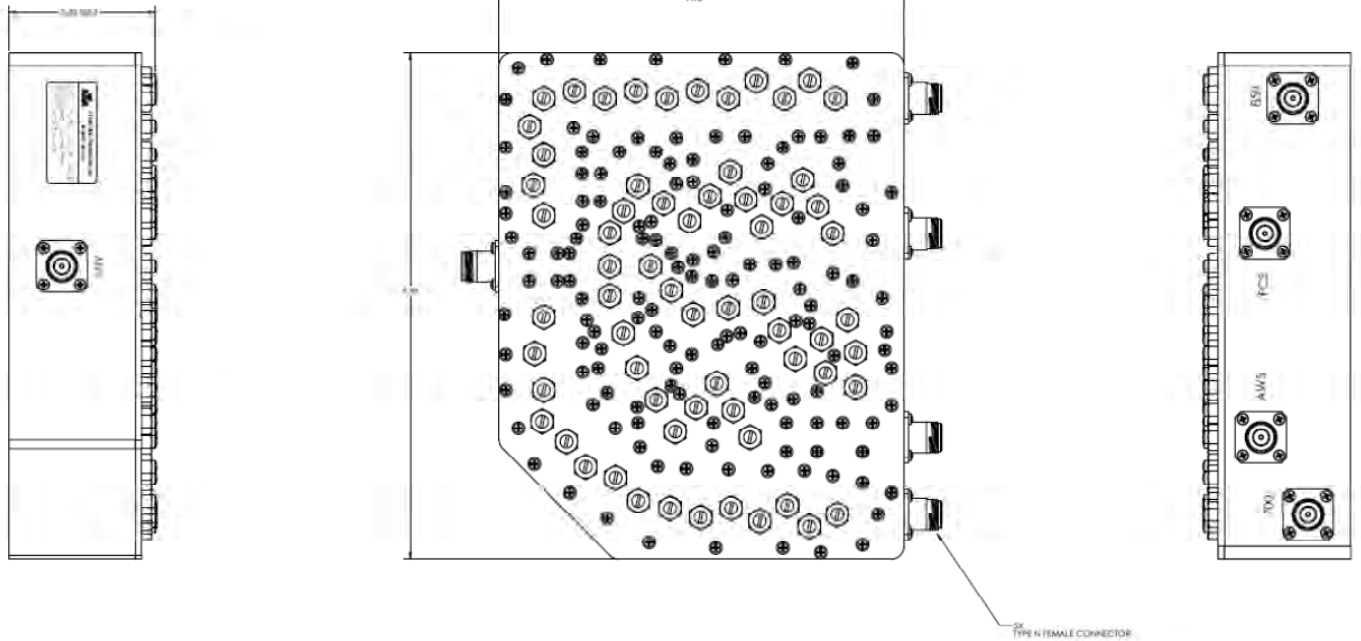

OUTLINE

Revision: 080514

28410 Crown Road
Tel: 410-860-0500
Web: www.clearcommtech.com

ClearComm Technologies, LLC
Clearly the Choice!

Fruitland, MD 21826
Fax: 410-860-9005
E-Mail: sales@clearcommtech.com